



# F254HD-20AHD0

Pitch	Open area	EU	∅ Rod	Flight	Sidewall	Curve
25,4 mm	0 %	✓	5,3 mm	✓	✓	✗

Material	Color	Resistance of the straight belt	Temperature		Belt weight
		Kg/m width	°C (min.)	°C (max.)	Kg/m <sup>2</sup>
Polypropylene PP	BL, WH	1155	1	100	5,6
Polyethylene PE	BL, NT	1105	- 60	60	5,8
Acetal POM	BL, WH	1520	- 40	80	8,9

## Widths

Modules	Minimum belt width (mm)	Width increments (mm)
Side (mm)		
152,4 / 292,1	152,4	12,7

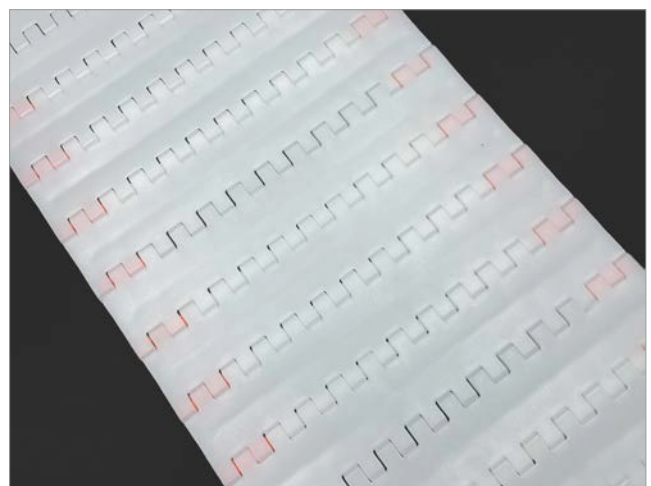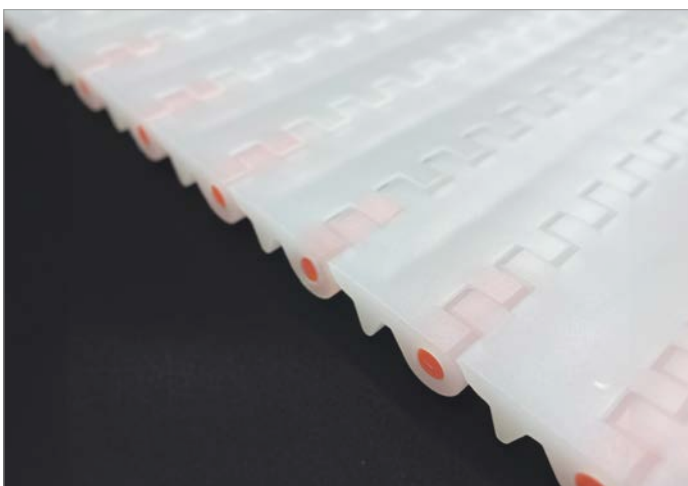

BL = Blue, NT = Natural, WH = White.