


## F508HD-10AHDN0



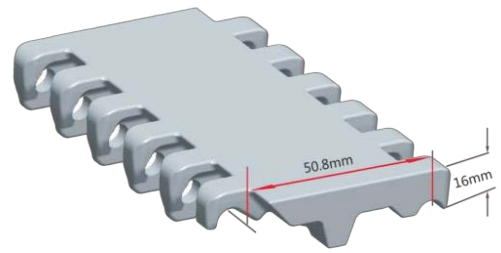


Pitch	Open area	EU	∅ Rod	Flight	Sidewall	Curve
50,8 mm	0 %	✓	5,8mm	✓	✓	✗

Material	Color	Resistance of the straight belt	Temperature		Belt weight
		Kg/m width	°C (min.)	°C (max.)	Kg/m <sup>2</sup>
Polypropylene PP	BL, WH	1340	1	100	9,3
Polyethylene PE	BL, NT	1280	- 60	60	9,8
Acetal POM	BL, WH	1770	- 40	80	14
Nylon PA	NT	1520	1	180	12,6

### Widths

Modules		Minimum belt width (mm)	Width increments (mm)
Central (mm)	Side (mm)		
100,5 / 150,8	100,5 / 150,8	251,3	16,75

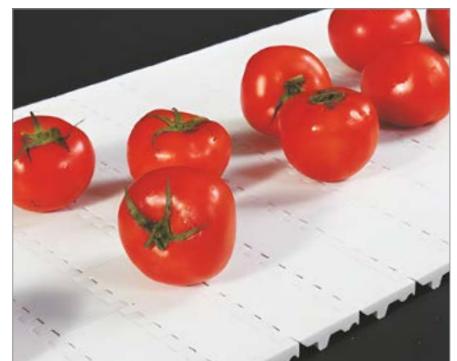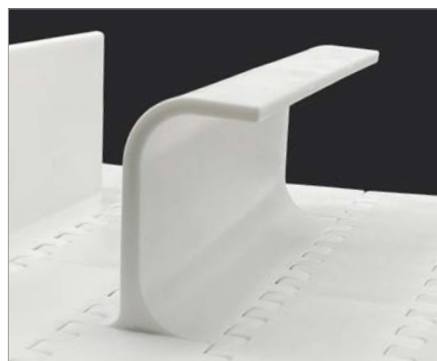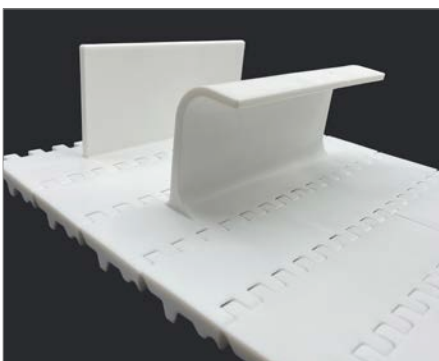

\*Consult availability.  
BL= Blue, NT= Natural, WH= White.